

A

B

C

D

E

A



B

C

D

E

RoHS
Compliance

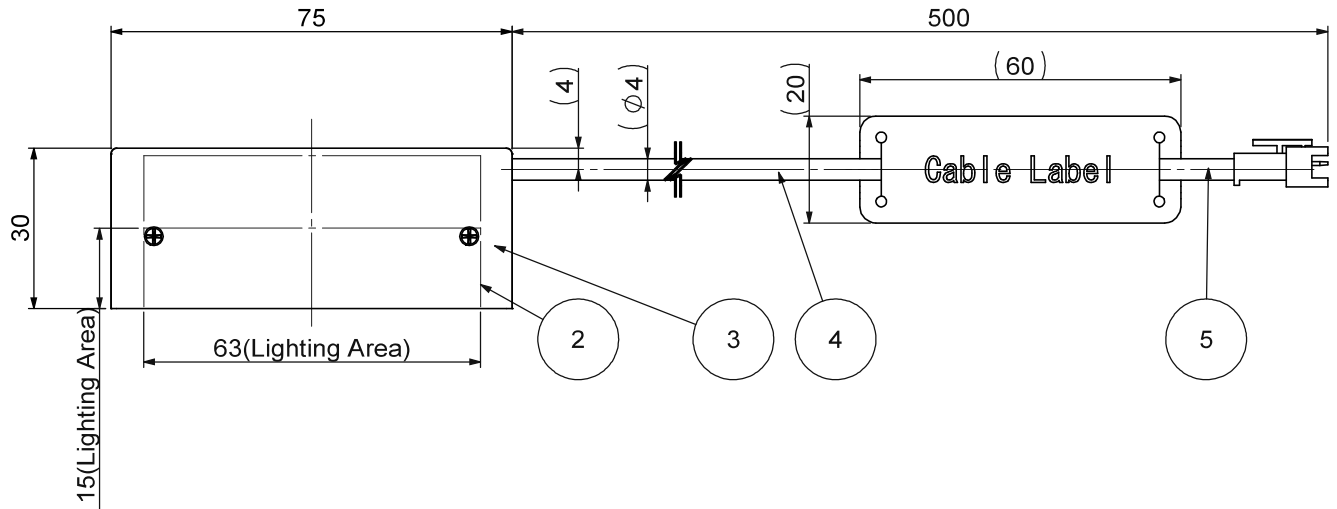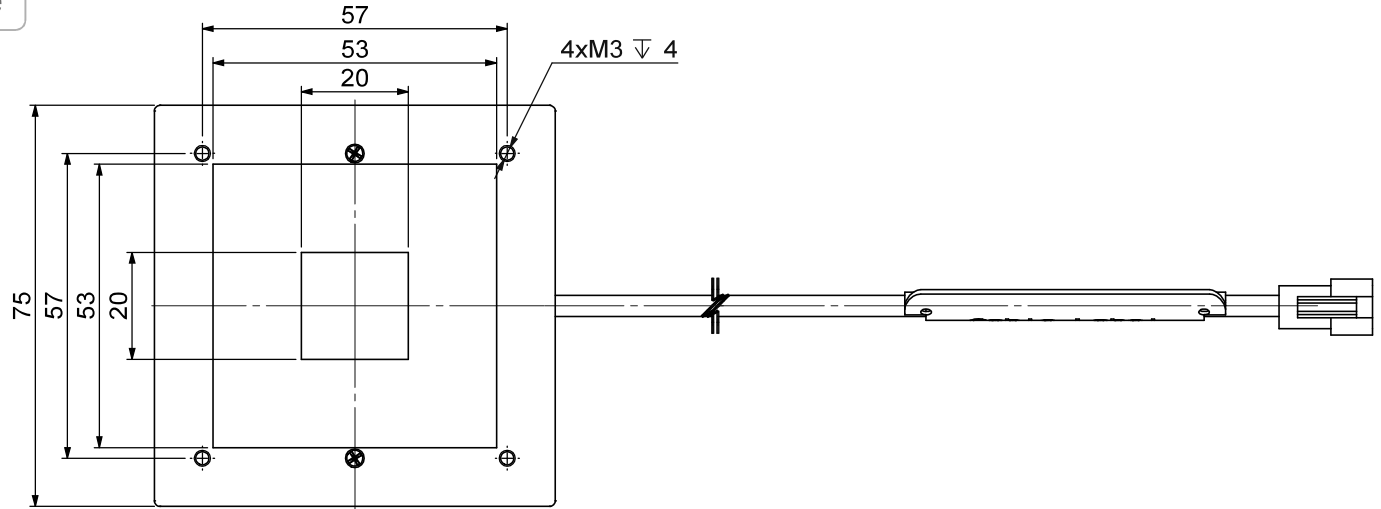

Absolute Max. Rating	24VDC
Power	0.7 W

JST SMP-03V-B CONNECTOR			
REF. DRAWING	No.	Assign	WIRE COLOR INSIDE
	PH1/1	+V	RED/BROWN
	PH1/3	-V	BLACK/BLUE

LENGTH OF SHORT ONE ON THE BAWK			
L ≤ 10	10 < L ≤ 50	50 < L ≤ 120	120 < L ≤ 400
±1°	±30'	±20'	±10'
TOL. A	TOL. B		

CLASS OF MEASURE			
L < 0.5	0.5 ≤ L ≤ 3	3 < L ≤ 6	6 < L
±0.2	±0.5	±1.0	±1.0
TOL. A	TOL. B		

CLASS OF MEASURE			
L < 0.5	0.5 ≤ L ≤ 3	3 < L ≤ 6	6 < L
±0.2	±0.5	±1.0	±1.0
TOL. A	TOL. B		

CLASS OF MEASURE			
L < 0.5	0.5 ≤ L ≤ 3	3 < L ≤ 6	6 < L
±0.2	±0.5	±1.0	±1.0
TOL. A	TOL. B		

CLASS OF MEASURE			
L < 0.5	0.5 ≤ L ≤ 3	3 < L ≤ 6	6 < L
±0.2	±0.5	±1.0	±1.0
TOL. A	TOL. B		

NO.	PART DESCRIPTION	MODEL NUMBER	QU.	NOTE
5	JST(SMP-03V-BC)	-	1	-
4	Cable	-	1	-
3	Lighting Guide Plate	-	4	-
2	Housing	-	1	-
1	LED	-	-	-

MARK	REV	DATE	CHANGE	SIGNATURE
A00	20130911	NEW		JK
DESIGNED	DRAWN	CHECKED	APPROVED	
Jacky Wang	Jacky Wang	Yong Peng	Jonathan Li	

FINISH	UNIT : mm		
SURFACE ROUGHNESS			
MATERIAL	MODEL NAME	CV-DSQ-75X75-15R	
CHAMFER	PART NAME	OUTLINE DRAWING	
TOLERANCE	DRAWING NO.	1479936	REV A00
SCALE 1:1	SHT	1/1	