


RoHS Compliance

Absolute Max. Rating	24VDC
Power	4.8W

JST SMR-03V-B CONNECTOR			
REF DRAWING	No	Assign	WIRE COLOR INSIDE
	PIN 1	+V	RED/BROWN
	PIN 3	-V	BLACK/BLUE

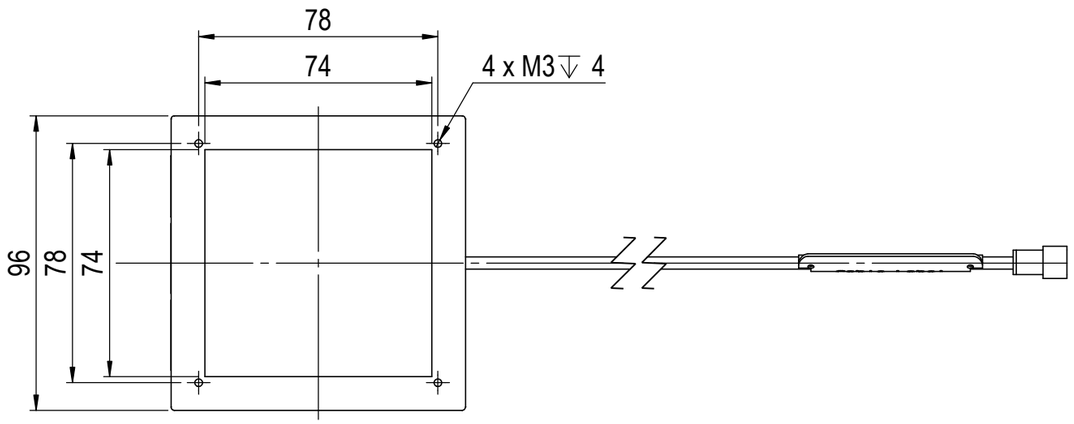

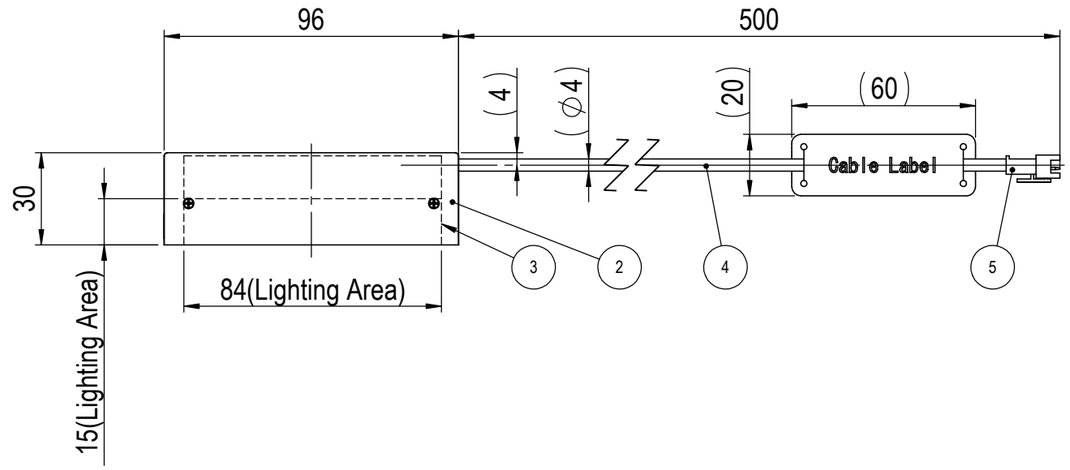

NO.	PART DESCRIPTION	MODEL NUMBER	QU.	NOTE
6				
5	JST (SMP-03V-BC)	-	1	-
4	Cable		1	
3	Light Guide Plate	-	4	-
2	Housing	-	1	-
1	LED	-		-

MARK	REV	DATE	CHANGE	SIGNATURE
⚠x	A00	02/25/2014	NEW	Judy

DESIGNED	DRAWN	CHECKED	APPROVED
Jacky Wang	Judy Cai	Sky Shu	Jonathan Li

FINISH

SURFACE ROUGHNESS

MATERIAL

CHAMFER

TOLERANCE

SCALE 1:2

UNIT : mm

MORITEX SCHOTT

MODEL NAME: CV-DSQ-96X96-15W1

PART NAME: OUTLINE DRAWING

DRAWING NO.: 1511027

REV: A00

SHT: 1/1

MOS-107-009

ORIGINAL SIZE:A-3

LENGTH OF SHORT ONE ON THE BANK: L≦10: ±1° | 10<L≦50: ±30' | 50<L≦120: ±20' | 120<L≦400: ±10' | 400<L: ±5'

ANGLE TOL. TOL.A TOL.B

CLASS OF MEASURE: L<0.5: IN DRW. | 0.5<L≦3: ±0.2 | 3<L≦6: ±0.5 | 6<L: ±1.0

CHAMFER TOL. TOL.A TOL.B

CLASS OF MEASURE: 0.5<L≦3: ±0.05 ±0.1 | 3<L≦6: ±0.1 ±0.2 | 6<L≦30: ±0.1 ±0.2 | 30<L≦120: ±0.15 ±0.3 | 120<L≦400: ±0.2 ±0.5 | 400<L≦1000: ±0.3 ±0.8

LENGTH TOL. TOL.A TOL.B