

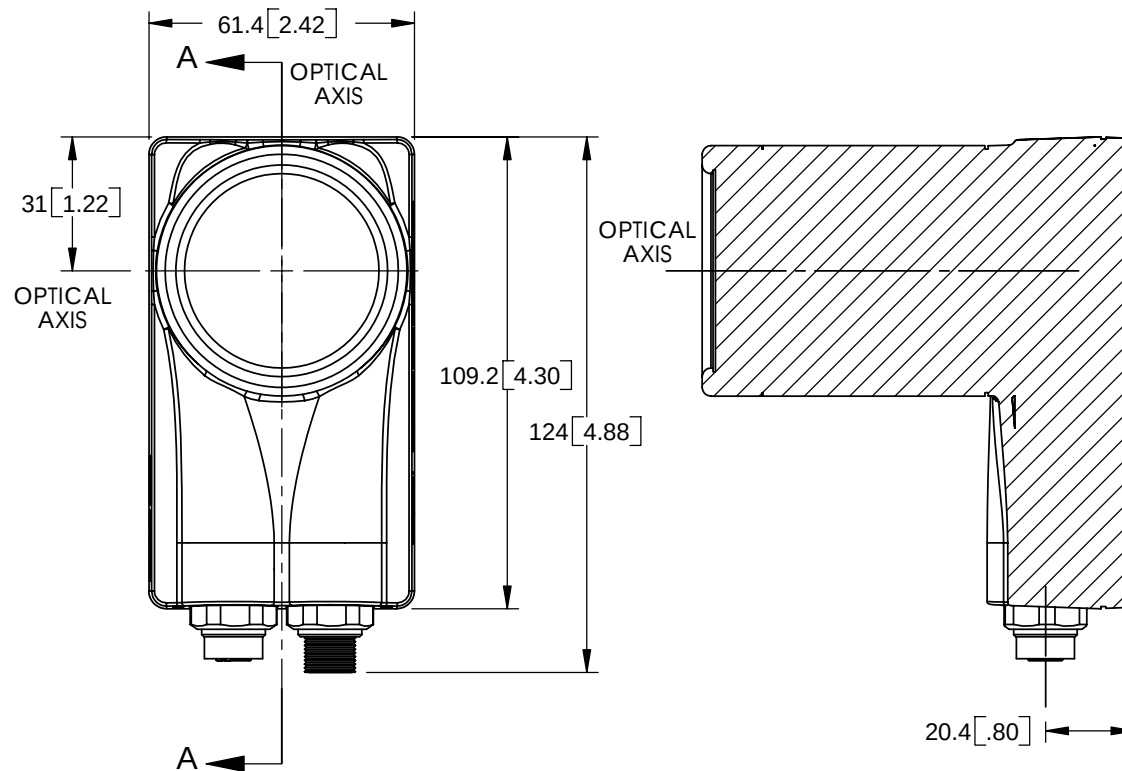


| REVISIONS |                 |
|-----------|-----------------|
| REV.      | DESCRIPTION     |
| 1/27/06   | INITIAL RELEASE |

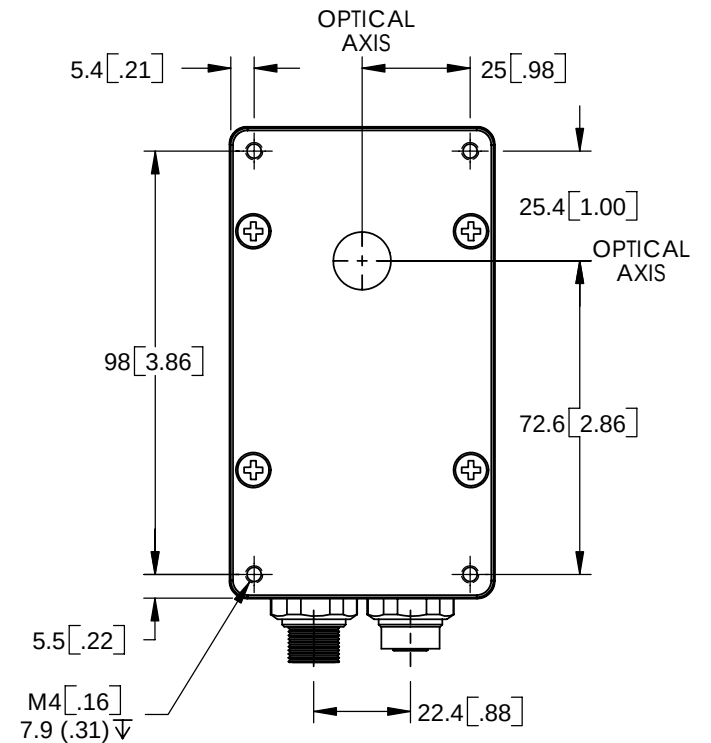

SECTION A-A  
SCALE 1 : 1.75

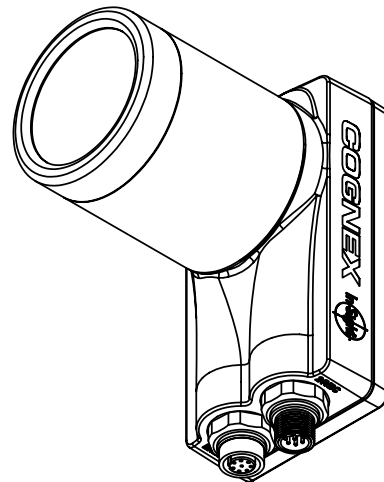

NOTES:

1. ALL DIMENSIONS FOR REFERENCE PURPOSES ONLY.
2. ALL SPECIFICATIONS MAY CHANGE WITHOUT NOTICE.
3. SEE IS002-01 FOR DIMENSIONS RELATED TO C-MOUNT LOCATION AND THREADING AND SENSOR LOCATION.

|                                                                                                    |  |                                                                                                                                   |                                                                                   |
|----------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| <b>DIMENSIONS:</b><br>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE DISPLAYED IN MILLIMETERS (INCHES) |  | <b>COGNEX</b><br>NATICK, MA 01760<br><a href="http://www.cognex.com/support/In-Sight.asp">www.cognex.com/support/In-Sight.asp</a> |                                                                                   |
| <b>TOLERANCES:</b><br>X.X OR X.XX: ± .01<br>X.XXX: ± .005<br>ANGULAR: ± .5°                        |  | <b>APPLIES TO:</b><br><b>IN-SIGHT 5400S, 5600S</b>                                                                                |                                                                                   |
| <b>GEOMETRIC TOLERANCES</b><br>PER ASME Y14.5M-1994                                                |  | <b>MATERIAL:</b><br>STAINLESS STEEL<br>ENCLOSURE AND<br>GLASS WINDOW                                                              | <b>SCALE:</b> AS INDICATED<br><b>DOC NO:</b> IS002-02<br><b>REL DATE:</b> 1/27/06 |