

STRAIGHTNESS & FLATNESS TOLERANCE	CLASS	NOMINAL LENGTH					
		L ≤ 10	10 < L ≤ 30	30 < L ≤ 100	100 < L ≤ 300	300 < L ≤ 1000	1000 < L ≤ 3000
	H	±0.02	±0.05	±0.1	±0.2	±0.3	±0.4
	K	±0.05	±0.1	±0.2	±0.4	±0.6	±0.8


PERPENDICULARITY TOLERANCE	CLASS	NOMINAL LENGTH ON SHORTER SIDE			
		L ≤ 100	100 < L ≤ 300	300 < L ≤ 1000	1000 < L ≤ 3000
	H	±0.2	±0.3	±0.4	±0.5
	K	±0.4	±0.6	±0.8	±1.0

RoHS

Absolute Max. Rating / 最大定格	24VDC
Total Power / 消費電力合計	21.7W

M12 Male Connector			
Ref. Drawing	No	Assign	Wire Color
	1	+V	Red/Brown
	2	NC	
	3	-V	Black/Blue
	4	NC	

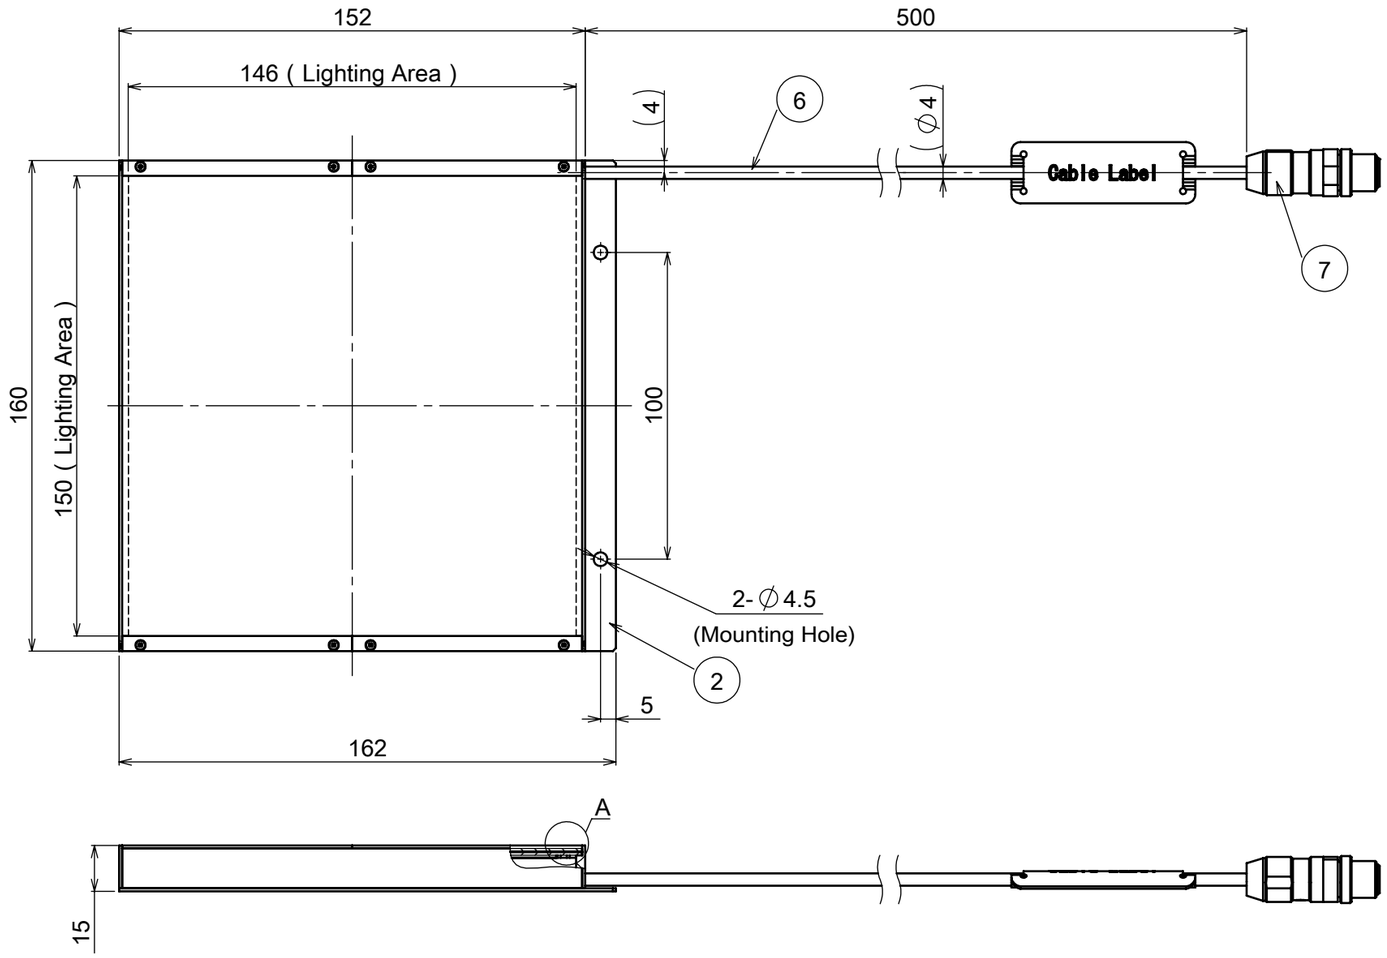

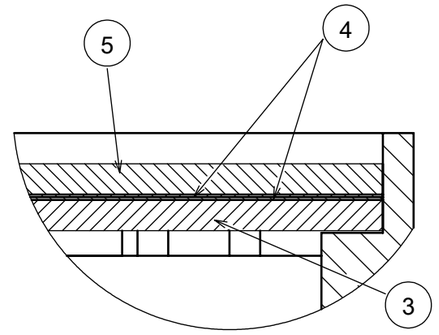

DETAIL A
(5:1)

NO.	PART DESCRIPTION	MODEL NUMBER	QU.	NOTE
7	CONNECTOR	SMR-03V-B	1	JST/Paired Connector:SMP-03V-BC
6	CABLE		1	
5	COVER PLATE		1	PMMA(Clear)
4	OPTICAL SHEET		2	
3	DIFFUSER PLATE		1	
2	HOUSING		1	Aluminium Alloy/Mat Black Anodizing
1	LED(Blue)			

MARK	COM-REV	DATE(YMD)	CHANGE	SIGNATURE
x				
x				
x				
x				
x	A-001	2017.May.08	NEW	-

DESIGNED	DRAWN	CHECKED	APPROVED
Yang Ye	Yang Ye	Yong	

FINISH	-
SURFACE	-
MATERIAL	-
CHAMFER	-
TOLERANCE CLASS	-
SCALE	1:2

UNIT:mm

MORITEX
Vision Creating Value

MODEL NAME: CV-NFL-150X146B-M12

PART NAME: OUTLINE DRAWING

DRAWING NO.: A22829A0100401A-001

SHEET: 1/1

LENGTH OF SHORTER SIDE OF ANGLE						
	L ≤ 10	10 < L ≤ 50	50 < L ≤ 120	120 < L ≤ 400	400 < L	
CLASS f	±1°	±30' (±0.5°)	±20' (±0.333°)	±10' (±0.166°)	±5' (±0.083°)	
CLASS m						

STANDARD DIMENSION RANGE						
	L < 0.2	0.2 ≤ L ≤ 0.5	0.5 < L ≤ 3	3 < L ≤ 6	6 < L	
CLASS f	IN DRW.	±0.1	±0.2	±0.5	±1.0	
CLASS m	DRW.	±0.05	±0.1	±0.2	±0.5	

STANDARD DIMENSION RANGE											
	L < 0.2	0.2 ≤ L ≤ 3	3 < L ≤ 6	6 < L ≤ 30	30 < L ≤ 120	120 < L ≤ 400	400 < L ≤ 1000				
CLASS f	IN DRW.	±0.1	±0.2	±0.1	±0.2	±0.15	±0.3	±0.2	±0.5	±0.3	±0.8
CLASS m	DRW.	±0.05	±0.1	±0.1	±0.2	±0.15	±0.3	±0.2	±0.5	±0.3	±0.8

ORIGINAL SHEET FORMAT SIZE : A3

ANGLE TOLERANCE

CHAMFER TOLERANCE

LENGTH TOLERANCE

OLD DRAWING NO.