


LMC-ML-M2518HR

HR series







Lens Type	Specifications	
Focus Position	Reference Magnification	M.O.D
Magnification	0.050	0.124
Focal Length (mm)	25.00	25.00
Fno	1.80~16.00	
Numerical Aperture	-	-
Working/Object Distance (mm)	500.0 / 515.3	200.0 / 215.3
Object to Image Distance (mm)	548.70	250.55
Mechanical Tube Length (mm)	29.9~33.0	
Lens Back (mm)	15.10	16.95
DOF @PCoC f0.04mm (mm)	64.332	11.312
Resolution @λ=550nm (μm)	-	-
Front/Rear Principal Position (mm)	10.89 / -11.13	10.89 / -11.13
Entrance/Exit Pupil Position (mm)	20.87 / -3.99	20.87 / -3.99
Entrance/Exit Pupil Diameter (mm)	13.89 / 9.93	13.89 / 9.93
Angle Of View (H x V) (deg.)	19.16 x 14.08	17.62 x 13.18
TV Distortion (%)	0.024	-0.070
Relative Illumination (%)	60.97	68.30
Weight (g)	40	
Mount	C Mount	
Filter Thread size	M25.5 x 0.5	
Image Circle (mm)	φ11	
Largest Compatible Camera (pixel size)	2/3 Inch (4.5μm)	

LMC-ML-M2518HR

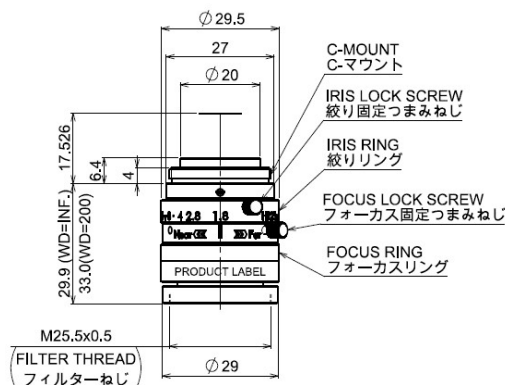

WD=500.0mm Fno2.8

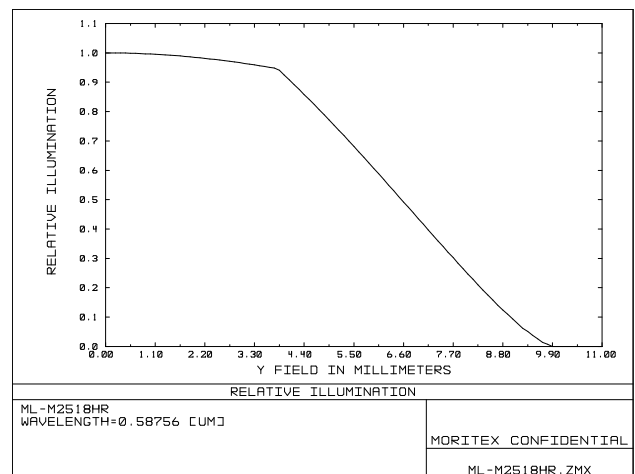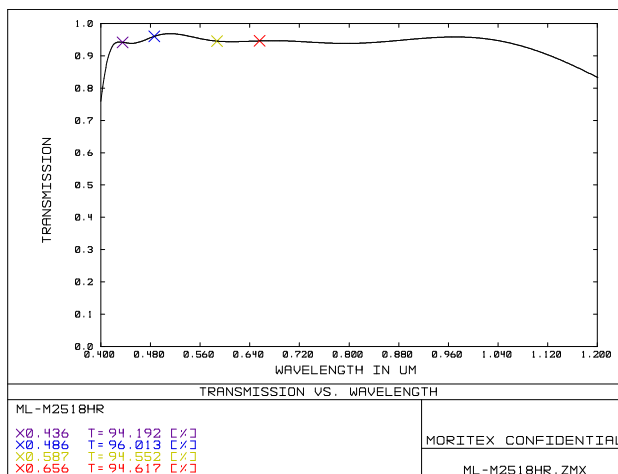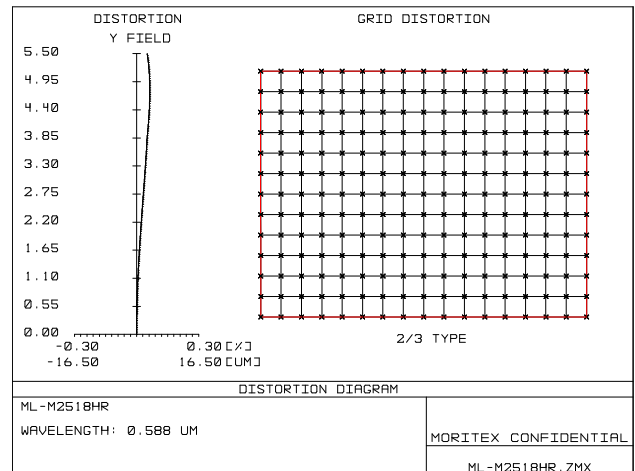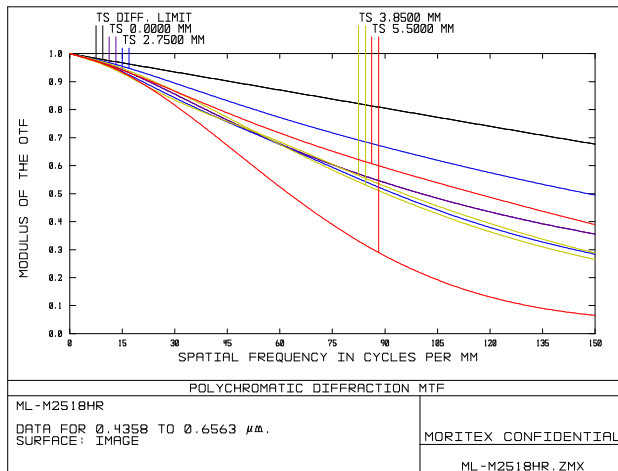

MORITEX Corporation

Technology Center : Lens Design & Development Technology

For support, please contact :





MORITEX North America, Inc.

TEL +1 (408) 363-2100 machine.vision@moritex.com

FAX +1 (408) 363-9985 www.moritex.com



WD=300.0mm Fno2.8

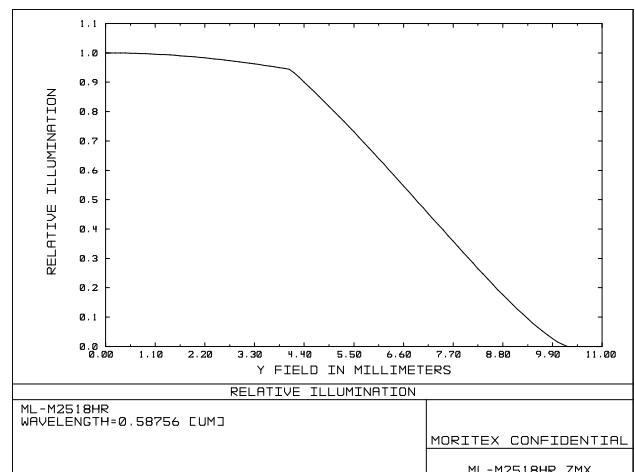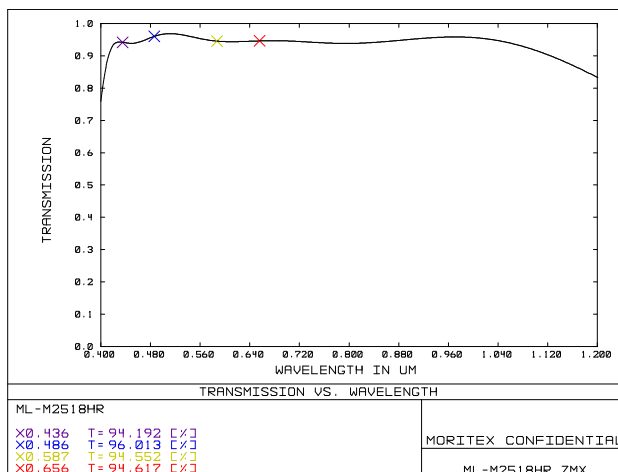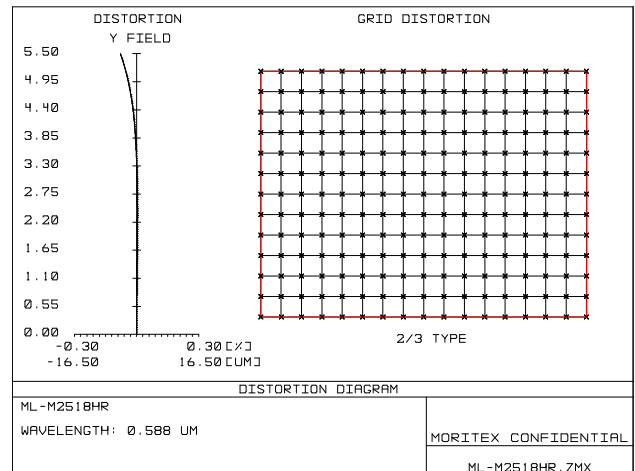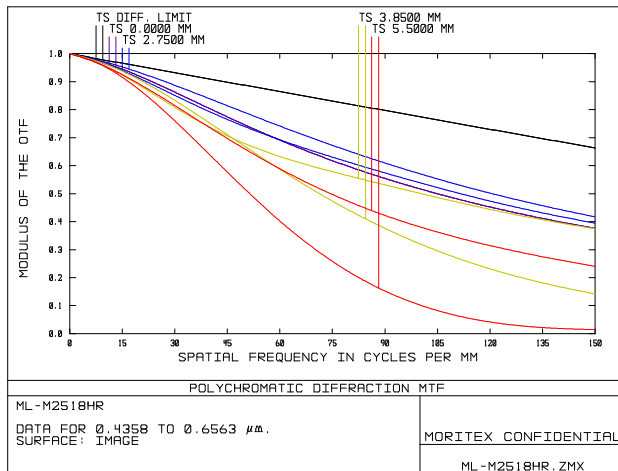

MORITEX Corporation

Technology Center : Lens Design & Development Technology

For support, please contact :





MORITEX North America, Inc.

TEL +1 (408) 363-2100 machine.vision@moritex.com

FAX +1 (408) 363-9985 www.moritex.com



WD=200.0mm Fno2.8

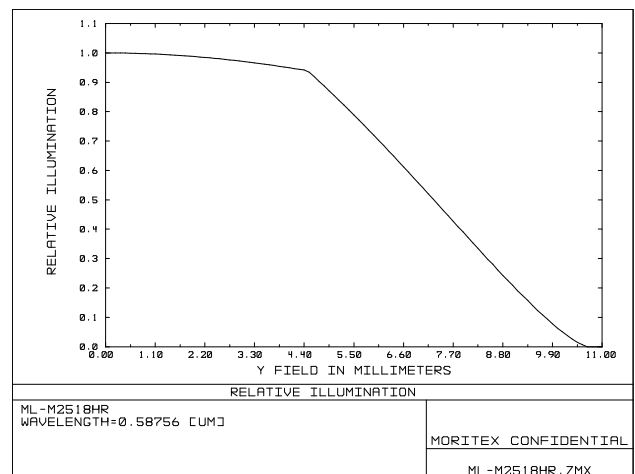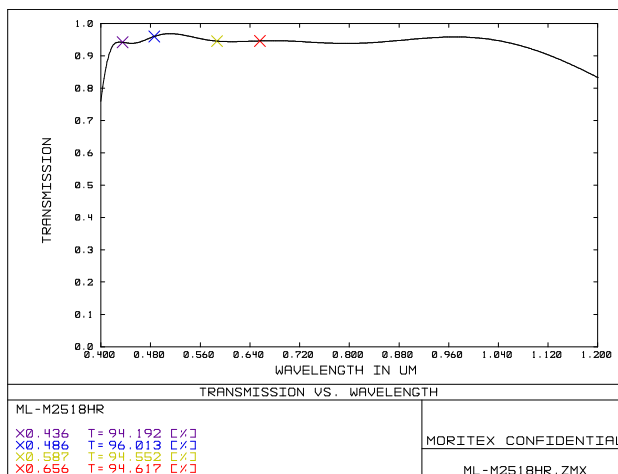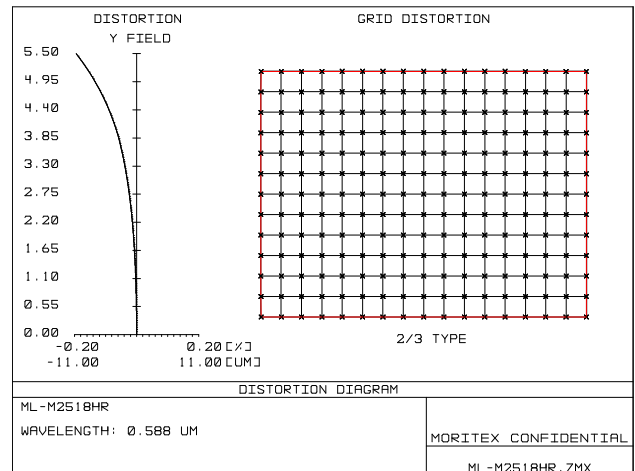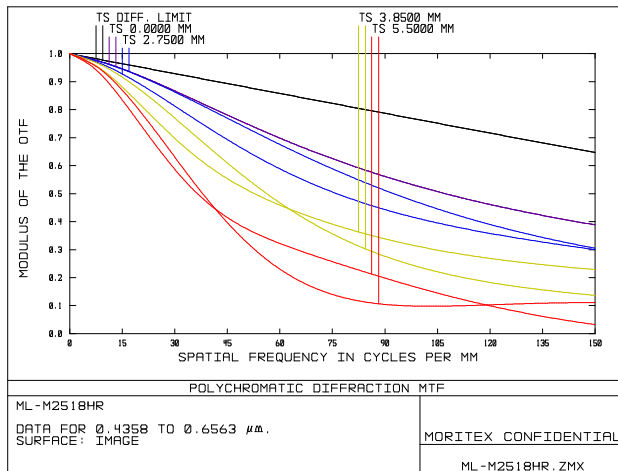

MORITEX Corporation

Technology Center : Lens Design & Development Technology

For support, please contact :

MORITEX North America, Inc.

TEL +1 (408) 363-2100 machine.vision@moritex.com

FAX +1 (408) 363-9985 www.moritex.com

