


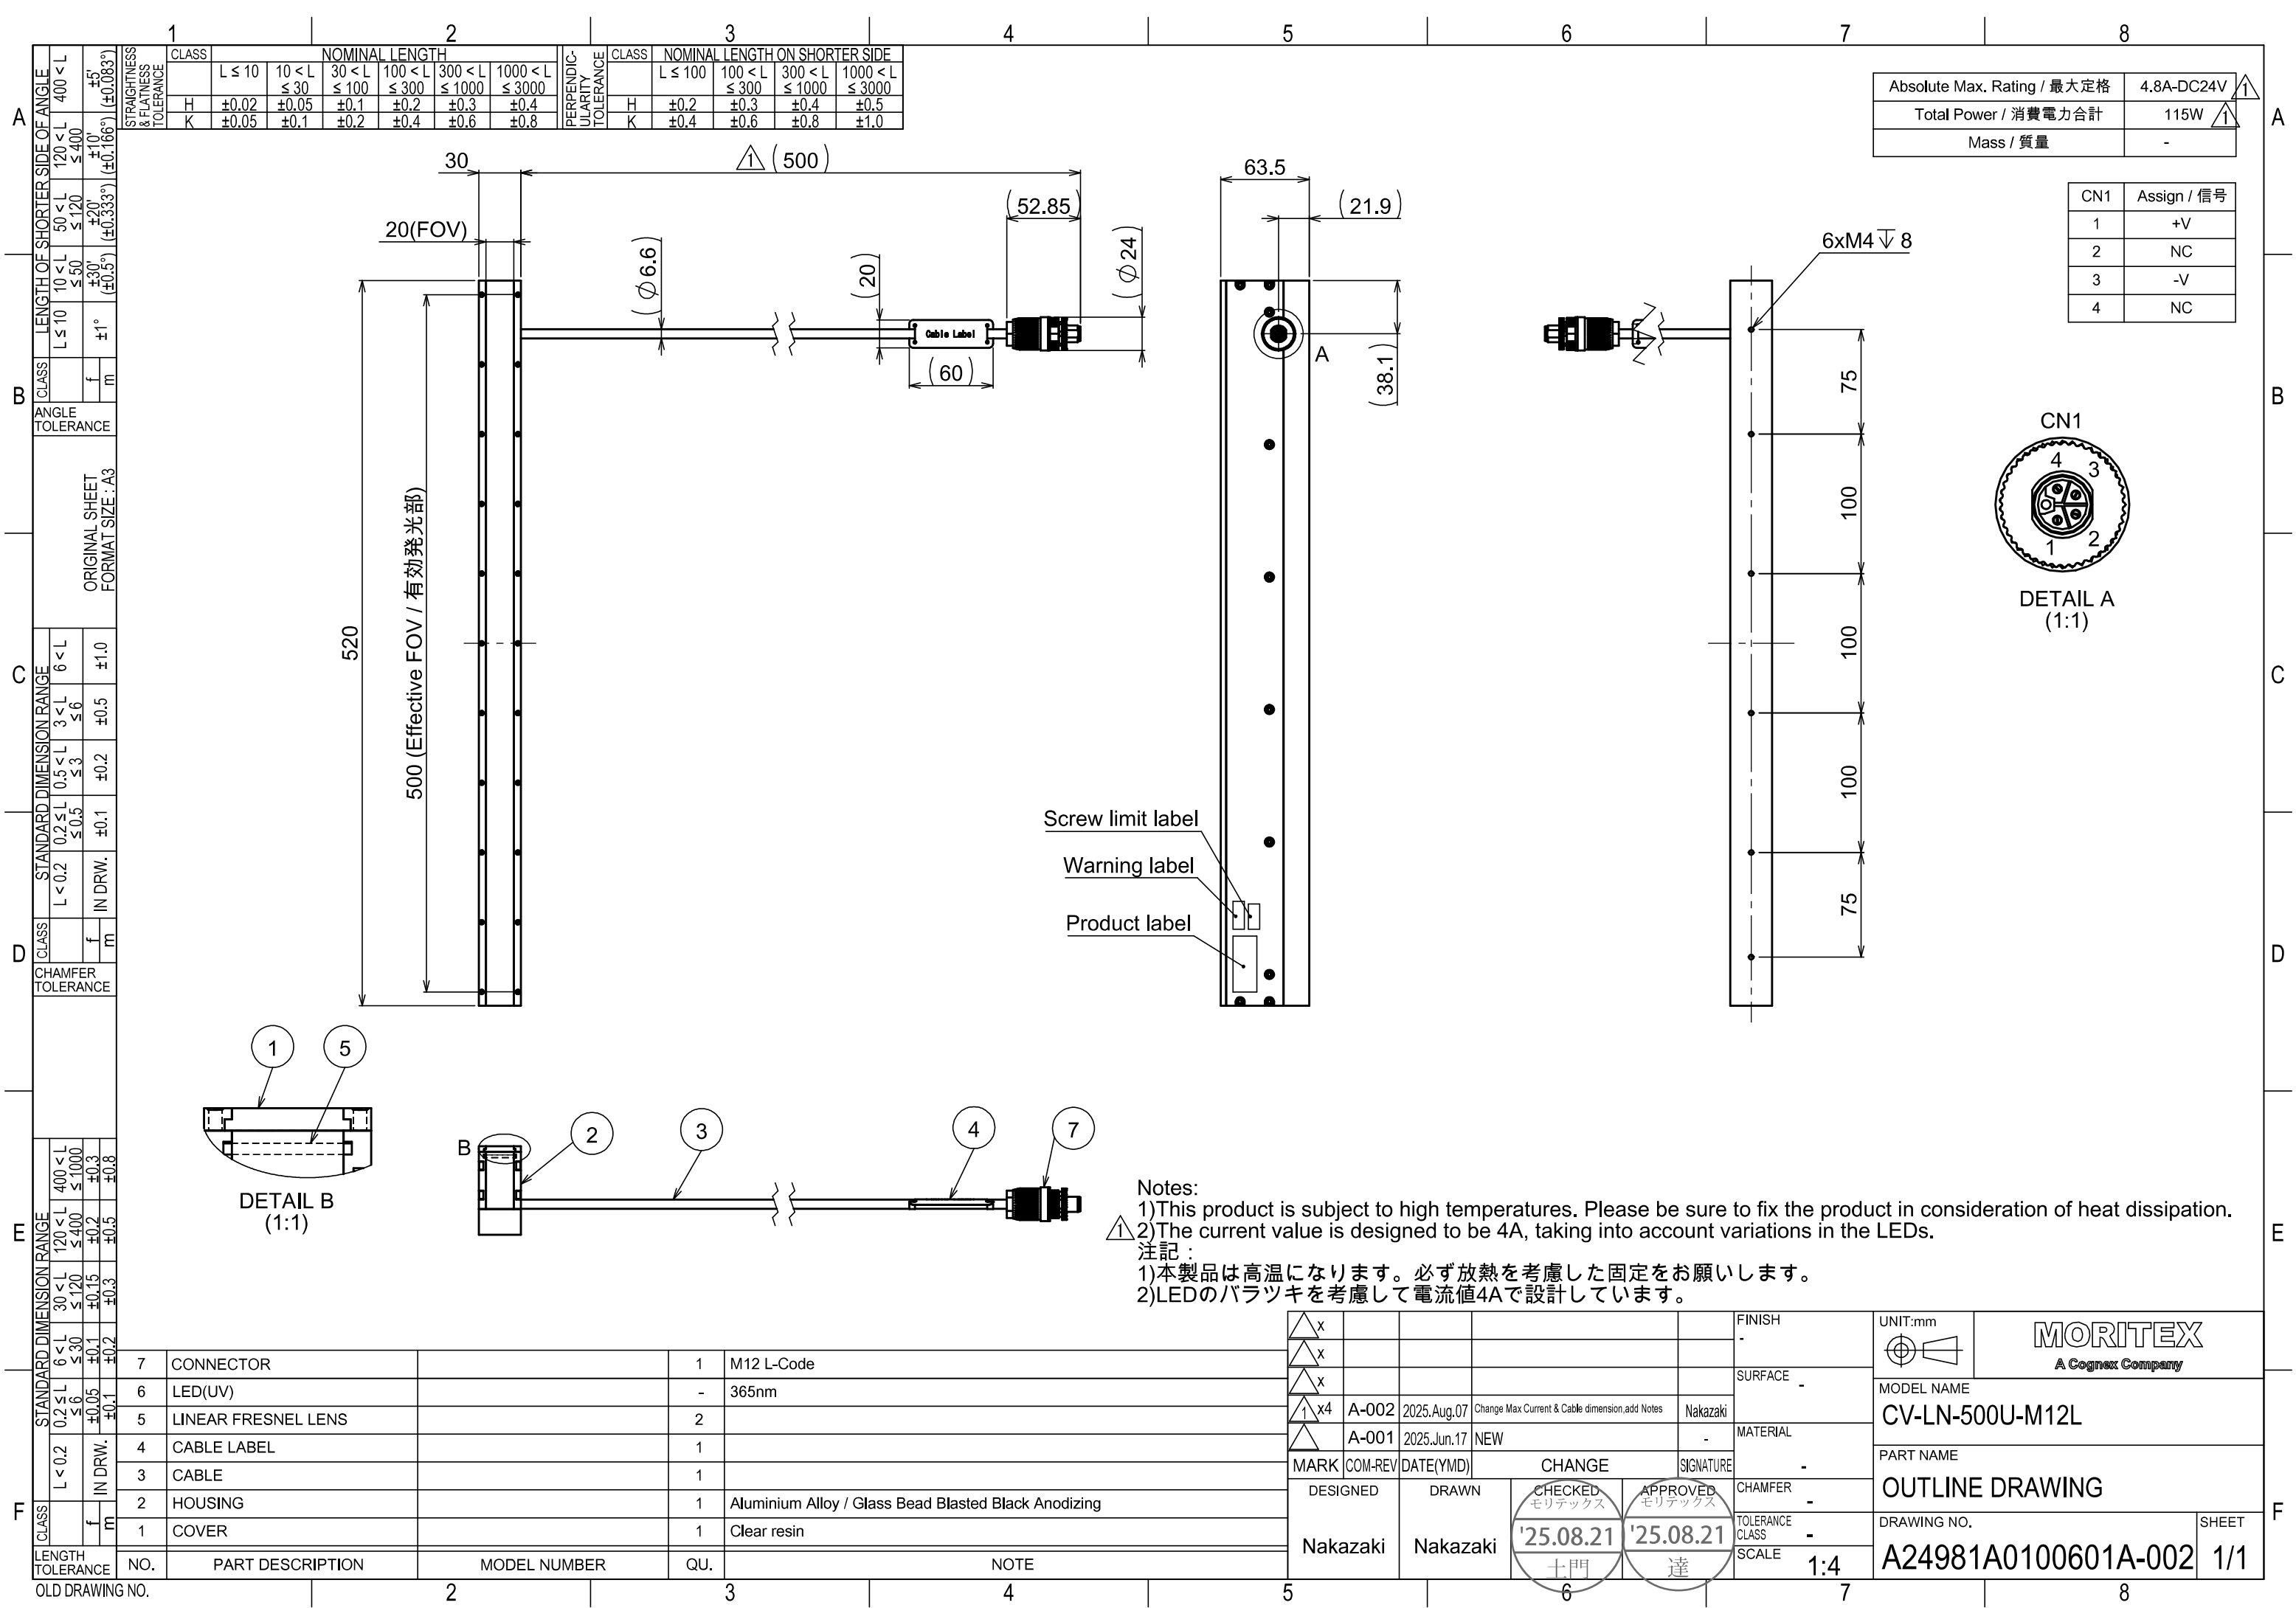

1		2		3		4		5		6		7		8	
CLASS		NOMINAL LENGTH		NOMINAL LENGTH ON SHORTER SIDE		CLASS		NOMINAL LENGTH ON SHORTER SIDE		CLASS		NOMINAL LENGTH ON SHORTER SIDE		CLASS	
L ≤ 10		10 < L ≤ 30		30 < L ≤ 100		100 < L ≤ 300		300 < L ≤ 1000		1000 < L ≤ 3000		L ≤ 100		100 < L ≤ 300	
±0.02		±0.05		±0.1		±0.2		±0.3		±0.4		±0.2		±0.3	
±0.05		±0.1		±0.2		±0.4		±0.6		±0.8		±0.4		±0.6	

Absolute Max. Rating / 最大定格		4.8A-DC24V	
Total Power / 消費電力合計		115W	
Mass / 質量		-	

CN1	Assign / 信号
1	+V
2	NC
3	-V
4	NC

STRAIGHTNESS & FLATNESS TOLERANCE		PERPENDICULARITY TOLERANCE	
CLASS		CLASS	
H		H	
K		K	

ANGLE TOLERANCE		ORIGINAL SHEET FORMAT SIZE : A3	
CLASS		CLASS	
f		m	
±1°		±0.083°	

STANDARD DIMENSION RANGE		STANDARD DIMENSION RANGE	
L < 0.2		L < 0.2	
0.2 ≤ L ≤ 0.5		0.2 ≤ L ≤ 0.5	
0.5 ≤ L ≤ 1.0		0.5 ≤ L ≤ 1.0	
IN DRW.		IN DRW.	
±0.1		±0.1	

CHAMFER TOLERANCE		CHAMFER TOLERANCE	
CLASS		CLASS	
f		m	
±0.1		±0.1	

STANDARD DIMENSION RANGE		STANDARD DIMENSION RANGE	
L < 0.2		L < 0.2	
0.2 ≤ L ≤ 0.5		0.2 ≤ L ≤ 0.5	
0.5 ≤ L ≤ 1.0		0.5 ≤ L ≤ 1.0	
IN DRW.		IN DRW.	
±0.1		±0.1	

CHAMFER TOLERANCE		CHAMFER TOLERANCE	
CLASS		CLASS	
f		m	
±0.1		±0.1	

STANDARD DIMENSION RANGE		STANDARD DIMENSION RANGE	
L < 0.2		L < 0.2	
0.2 ≤ L ≤ 0.5		0.2 ≤ L ≤ 0.5	
0.5 ≤ L ≤ 1.0		0.5 ≤ L ≤ 1.0	
IN DRW.		IN DRW.	
±0.1		±0.1	

CHAMFER TOLERANCE		CHAMFER TOLERANCE	
CLASS		CLASS	
f		m	
±0.1		±0.1	

STANDARD DIMENSION RANGE		STANDARD DIMENSION RANGE	
L < 0.2		L < 0.2	
0.2 ≤ L ≤ 0.5		0.2 ≤ L ≤ 0.5	
0.5 ≤ L ≤ 1.0		0.5 ≤ L ≤ 1.0	
IN DRW.		IN DRW.	
±0.1		±0.1	

CHAMFER TOLERANCE		CHAMFER TOLERANCE	
CLASS		CLASS	
f		m	
±0.1		±0.1	

STANDARD DIMENSION RANGE		STANDARD DIMENSION RANGE	
L < 0.2		L < 0.2	
0.2 ≤ L ≤ 0.5		0.2 ≤ L ≤ 0.5	
0.5 ≤ L ≤ 1.0		0.5 ≤ L ≤ 1.0	
IN DRW.		IN DRW.	
±0.1		±0.1	

CHAMFER TOLERANCE		CHAMFER TOLERANCE	
CLASS		CLASS	
f		m	
±0.1		±0.1	