


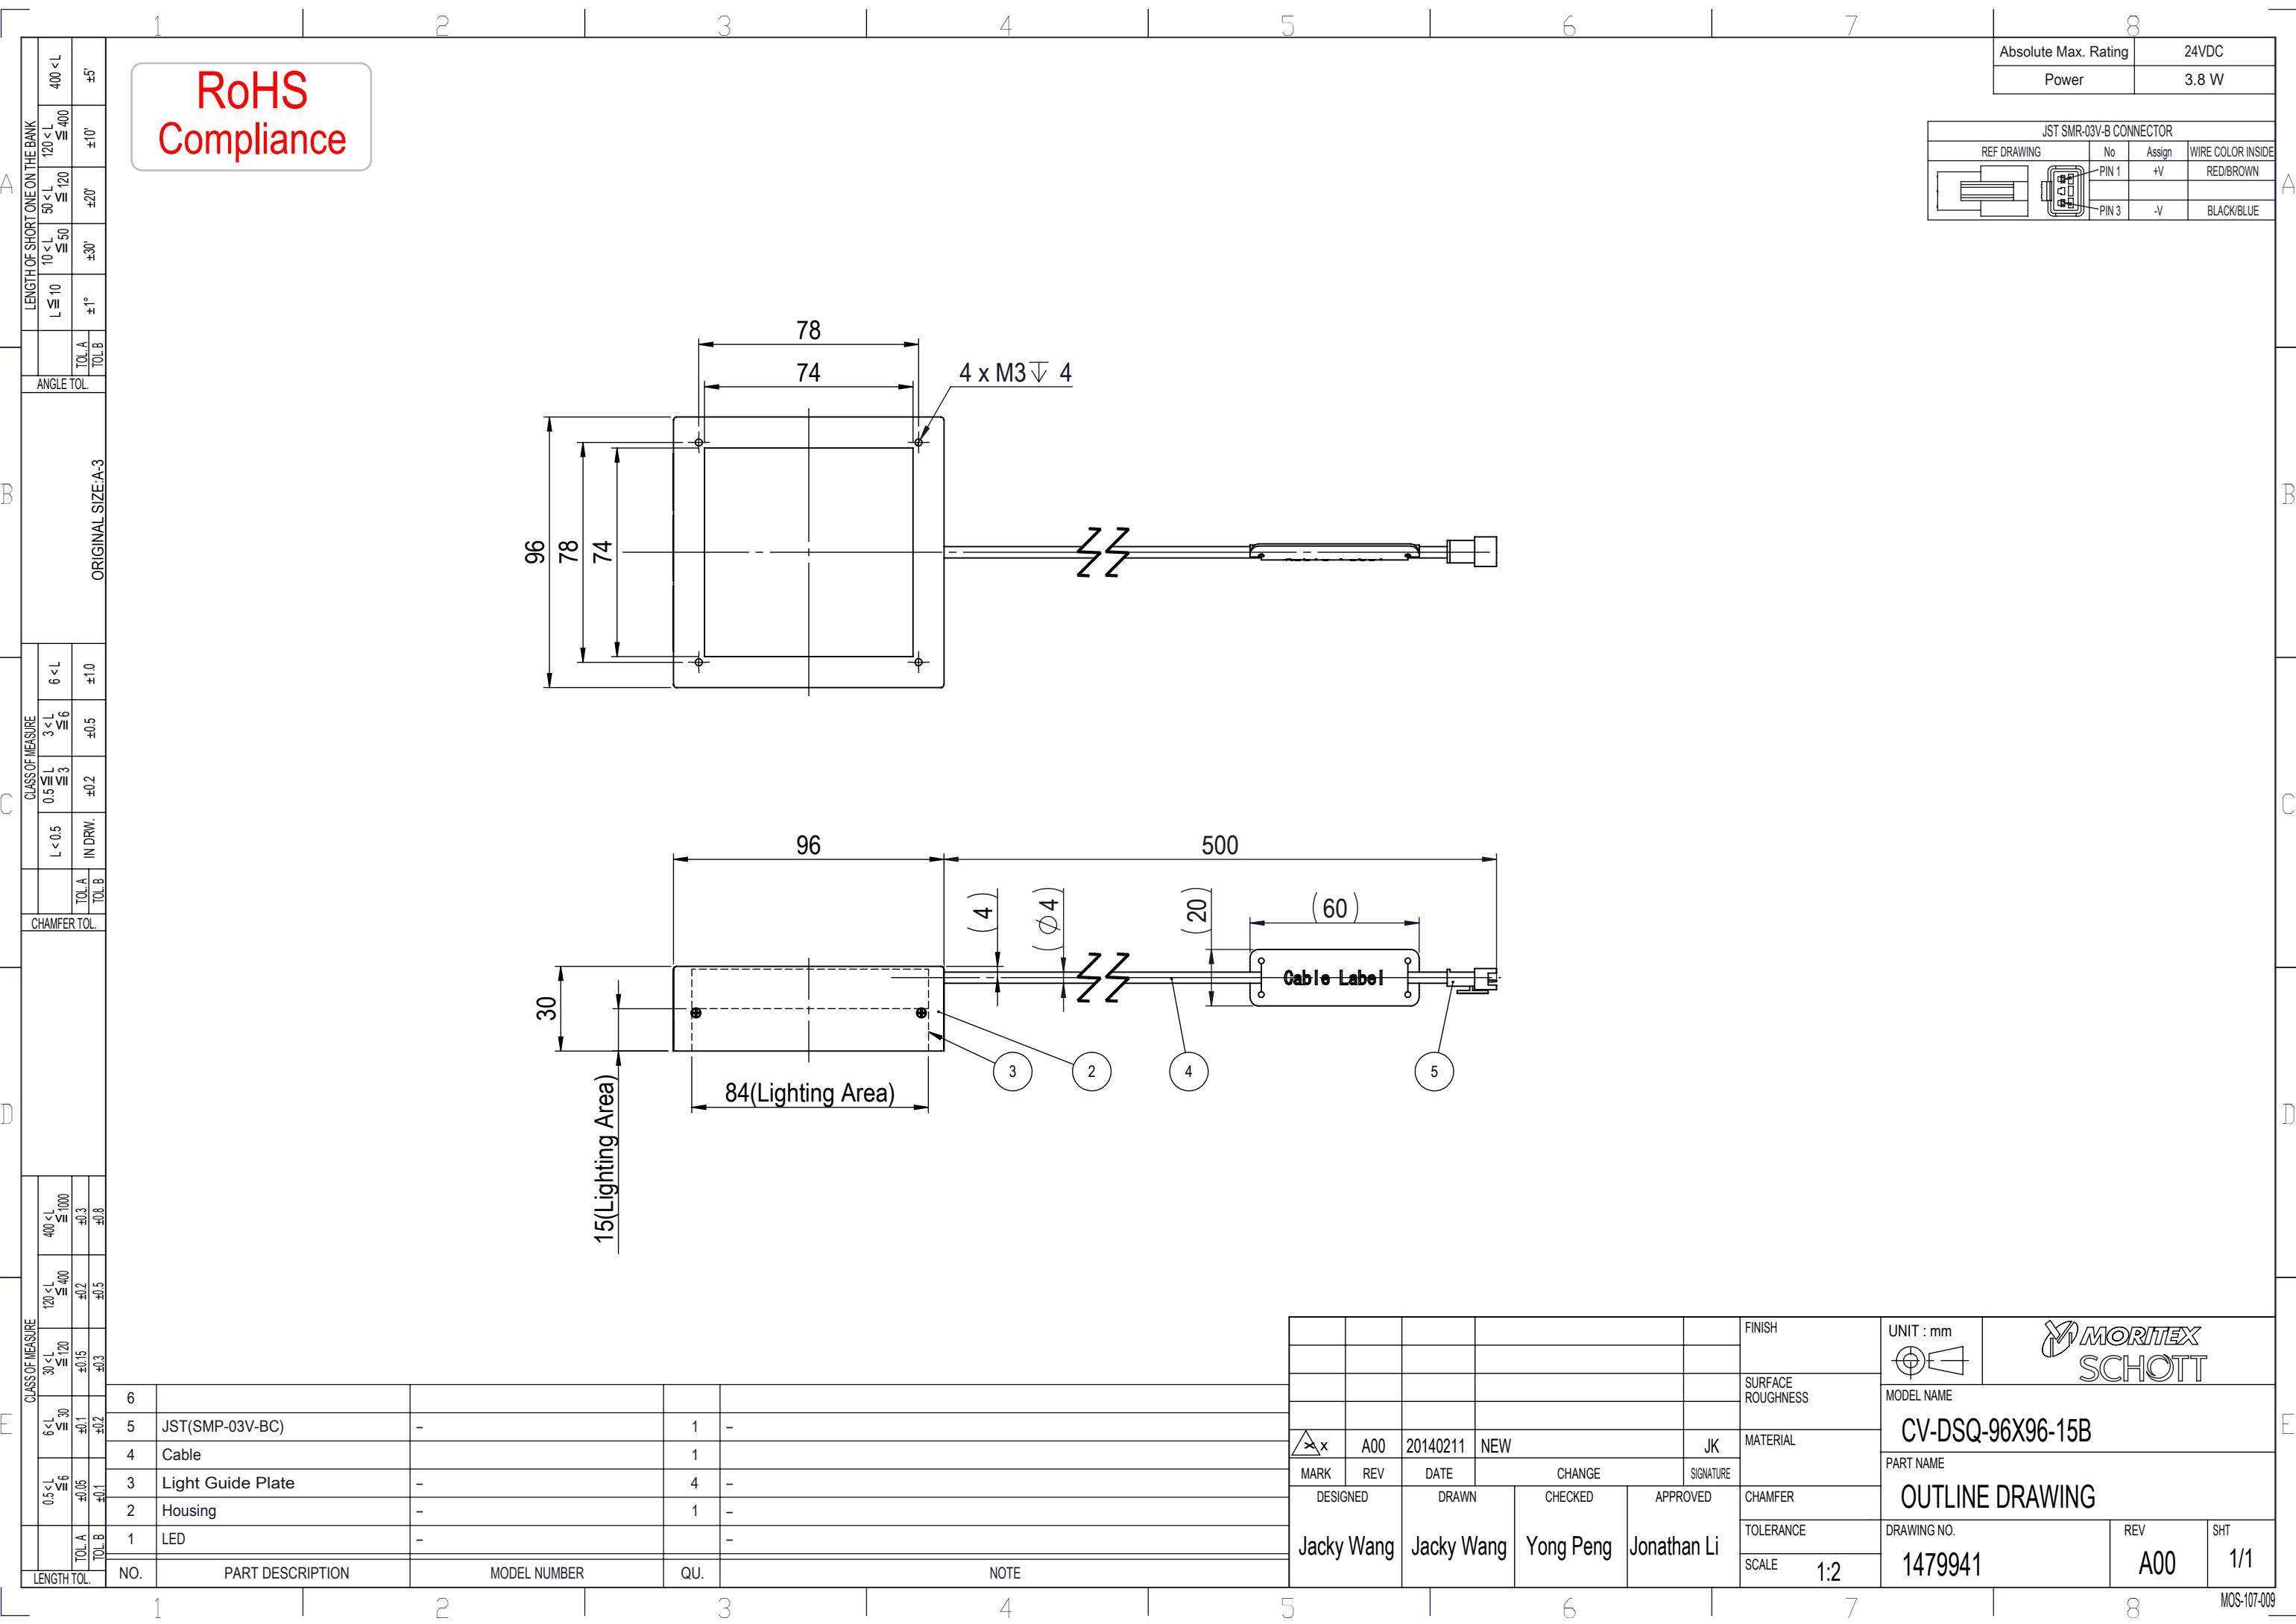

RoHS
Compliance

Absolute Max. Rating	24VDC
Power	3.8 W

JST SMR-03V-B CONNECTOR			
REF DRAWING	No	Assign	WIRE COLOR INSIDE
	PIN 1	+V	RED/BROWN
	PIN 3	-V	BLACK/BLUE

CLASS OF MEASURE		CLASS OF MEASURE		CLASS OF MEASURE		CLASS OF MEASURE		CLASS OF MEASURE	
		CLASS OF MEASURE		CLASS OF MEASURE		CLASS OF MEASURE		CLASS OF MEASURE	
0.5 < L	≤ 6	6 < L	≤ 30	30 < L	≤ 120	120 < L	≤ 400	400 < L	≤ 1000
±0.05	±0.1	±0.1	±0.2	±0.15	±0.2	±0.3	±0.5	±0.3	±0.8
TOL. A	TOL. B	TOL. A	TOL. B	TOL. A	TOL. B	TOL. A	TOL. B	TOL. A	TOL. B
1	LED	2	Housing	3	Light Guide Plate	4	Cable	5	JST(SMP-03V-BC)
6									
NO.	PART DESCRIPTION	MODEL NUMBER	QU.	NOTE					

					FINISH	UNIT : mm			
					SURFACE ROUGHNESS				
					MATERIAL		CV-DSQ-96X96-15B		
					CHAMFER		OUTLINE DRAWING		
					TOLERANCE		DRAWING NO.	REV	SHT
					SCALE 1:2		1479941	A00	1/1