
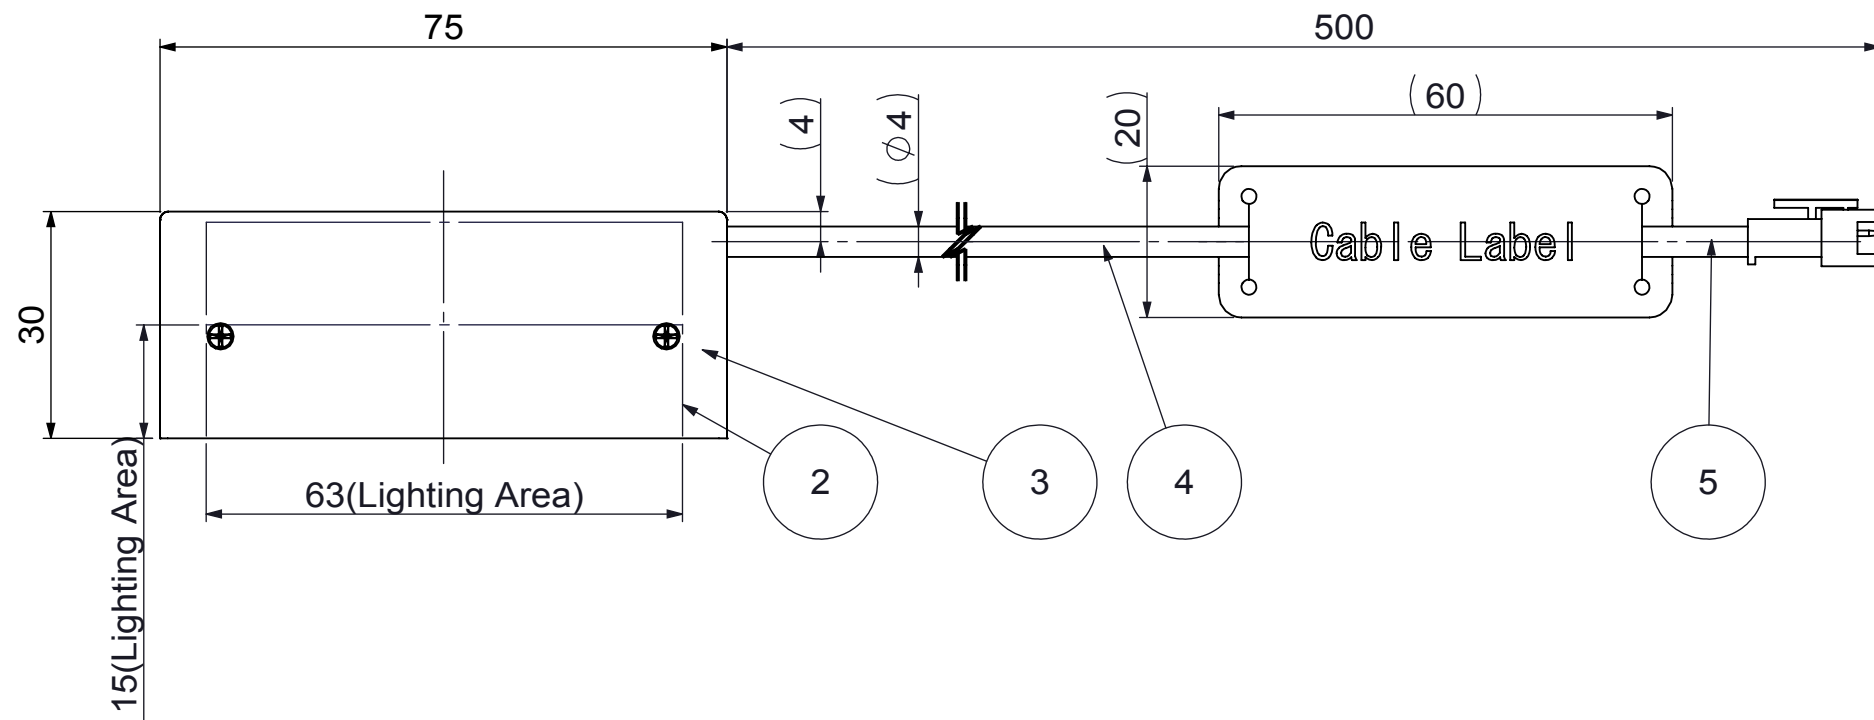


Absolute Max. Rating	24VDC
Power	2.6 W

JST SMR-03V-B CONNECTOR			
REF DRAWING	No	Assign	WIRE COLOR INSIDE
	PIN 1	+V	RED/BROWN
	PIN 3	-V	BLACK/BLUE

RoHS Compliance

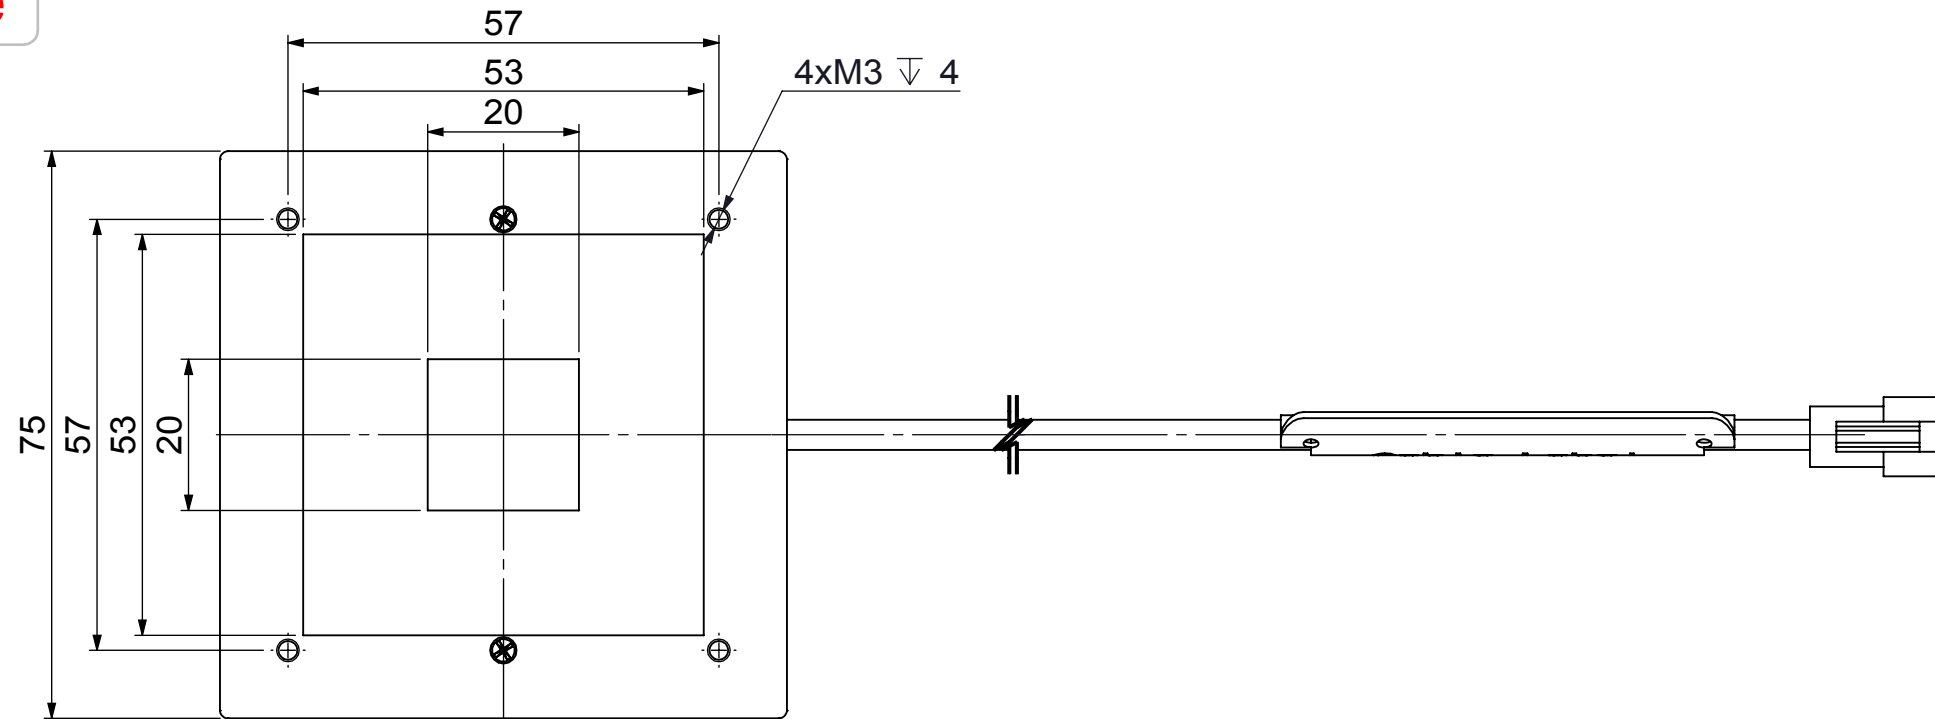

ANGLE TOL.	LENGTH OF SHORT ONE ON THE BANK			
	TOL. A	TOL. B	10' < L ≤ 50'	50' < L ≤ 120'
	±1°	±30'	±20'	±10'
				400' < L
				±5'

ANGLE TOL.

ORIGINAL SIZE:A-3

CHAMFER TOL.		CLASS OF MEASURE		
		L < 0.5	0.5 L ≤ 3	3 < L
				6 < L
TOL. A	TOL. B	IN DRW.	±0.2	±0.5
				±1.0

CHAMFER TO

LENGTH TOL.	CLASS OF MEASURE			
	$0.5 < L$ ≤ 6	$6 < L$ ≤ 30	$30 < L$ ≤ 120	$120 < L$ ≤ 400
TOL. A	± 0.05	± 0.1	± 0.15	± 0.2
TOL. B	± 0.1	± 0.2	± 0.3	± 0.5
				$400 < L$ ≤ 1000
				± 0.3
				± 0.8

LENGTH TOL.

5	JST(SMP-03V-BC)	-	1	-
4	Cable	-	1	-
3	Lighting Guide Plate	-	4	-
2	Housing	-	1	-
1	LED	-		-
NO.	PART DESCRIPTION	MODEL NUMBER	QU.	NOTE

						FINISH	UNIT : mm 	MORITEX SCHOTT
						SURFACE ROUGHNESS	MODEL NAME	
						MATERIAL	CV-DSQ-75X75-15B	
	A00	20130911	NEW		JK	PART NAME		
MARK	REV	DATE	CHANGE		SIGNATURE	OUTLINE DRAWING		
DESIGNED		DRAWN		CHECKED	APPROVED	CHAMFER	DRAWING NO.	REV
Jacky Wang		Jacky Wang		Yong Peng	Jonathan Li	TOLERANCE	1479938	A00
						SCALE		SHT
						1:1		1/1