
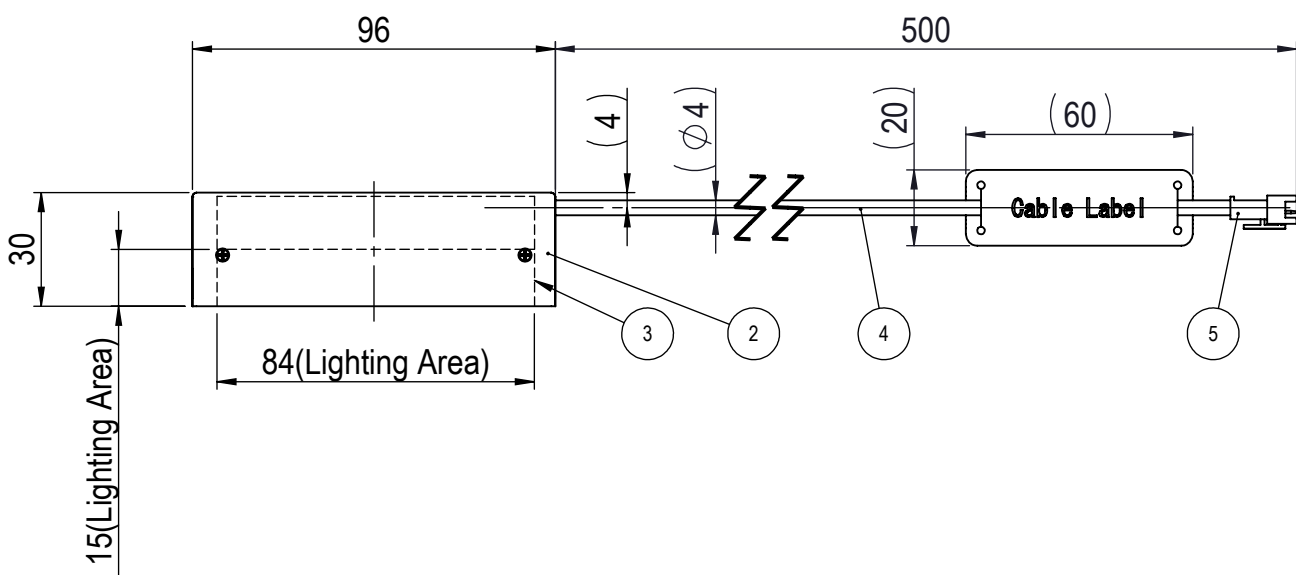


**RoHS
Compliance**

Absolute Max. Rating	24VDC
Power	0.9 W

JST SMR-03V-B CONNECTOR			
REF DRAWING	No	Assign	WIRE COLOR INSIDE
	PIN 1	+V	RED/BROWN
	PIN 3	-V	BLACK/BLUE

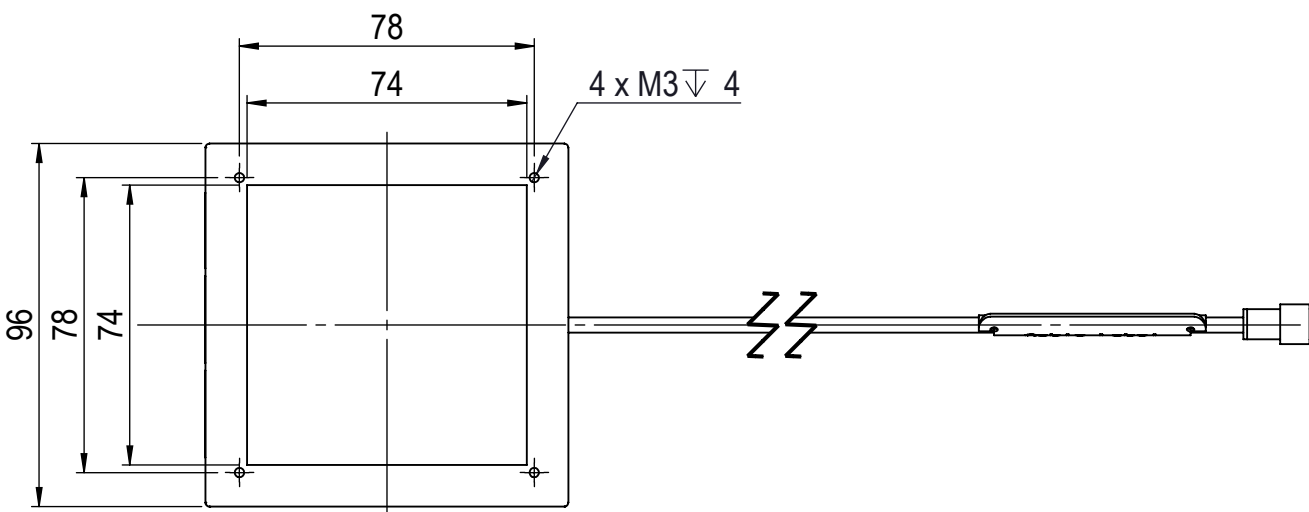

LENGTH OF SHORT ONE ON THE BANK	
$L \leq 10$	$10 < L \leq 50$
	$50 < L \leq 120$
	$120 < L \leq 400$
	$400 < L$

ANGLE TOL.

ORIGINAL SIZE:A-3

CLASS OF MEASURE		
L < 0.5	$0.5 \leq L \leq 3$	$3 < L \leq 6$
IN DRW.	± 0.2	± 0.5
		± 1.0

CHAMFER TO

		CLASS OF MEASURE				
		$0.5 < L$ ≤ 6	$6 < L$ ≤ 30	$30 < L$ ≤ 120	$120 < L$ ≤ 400	$400 < L$ ≤ 1000
	TOL. A	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3
	TOL. B	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8

LENGTH TO

6				
5	JST(SMP-03V-BC)	-	1	-
4	Cable		1	
3	Light Guide Plate	-	4	-
2	Housing	-	1	-
1	LED	-		-

						FINISH	UNIT : mm 					
						SURFACE ROUGHNESS	MODEL NAME					
							CV-DSQ-96X96-15R					
	A00	20140211	NEW			JK	MATERIAL	PART NAME				
MARK	REV	DATE	CHANGE			SIGNATURE	OUTLINE DRAWING					
DESIGNED		DRAWN		CHECKED	APPROVED	CHAMFER	DRAWING NO.			REV	SHT	
Jacky Wang		Jacky Wang		Yong Peng	Jonathan Li	TOLERANCE	1479939			A00	1/1	
						SCALE	1:2					