

Compact LED Controller

CV-DPS-DD-72-1

COMING SOON

Compact

High Power

Cost-Effective

Features

- High power output : 72W (24V x 3A)
- Compact, DIN rail mountable design : W35mm x H95mm x D53mm ^{*1}
- PWM lighting control, 256 steps
- Remote On/Off trigger input
- 14 strobe timing options

Specifications

Model Name	CV-DPS-DD-72-1
Input Voltage	24V $\pm$ 10%
Input Current	3.5A
Output Channel	1 Ch
Max. Output Power	72W
Output Voltage	24V
Output Current	3A ^{*2}
Output Mode	CW, On/Off, Strobe
Dimming Steps	256 steps
PWM Frequency	100 kHz
Trigger Input Range	5-24V
Input Connector	M12 – Male
Output Connector	M12 – Female
Operating Temperature	0 - 45 ° C
Operating Humidity.	$\leq$ 80% RH
Size	W35mm x H95mm x D53mm ^{*1}
IP Rating	IP20
CE	EN55011, EN61000


^{*1} Dials and cables excluded

^{*2} Depends on the input voltage



MORITEX
Vision Creating Value

Outline Drawing

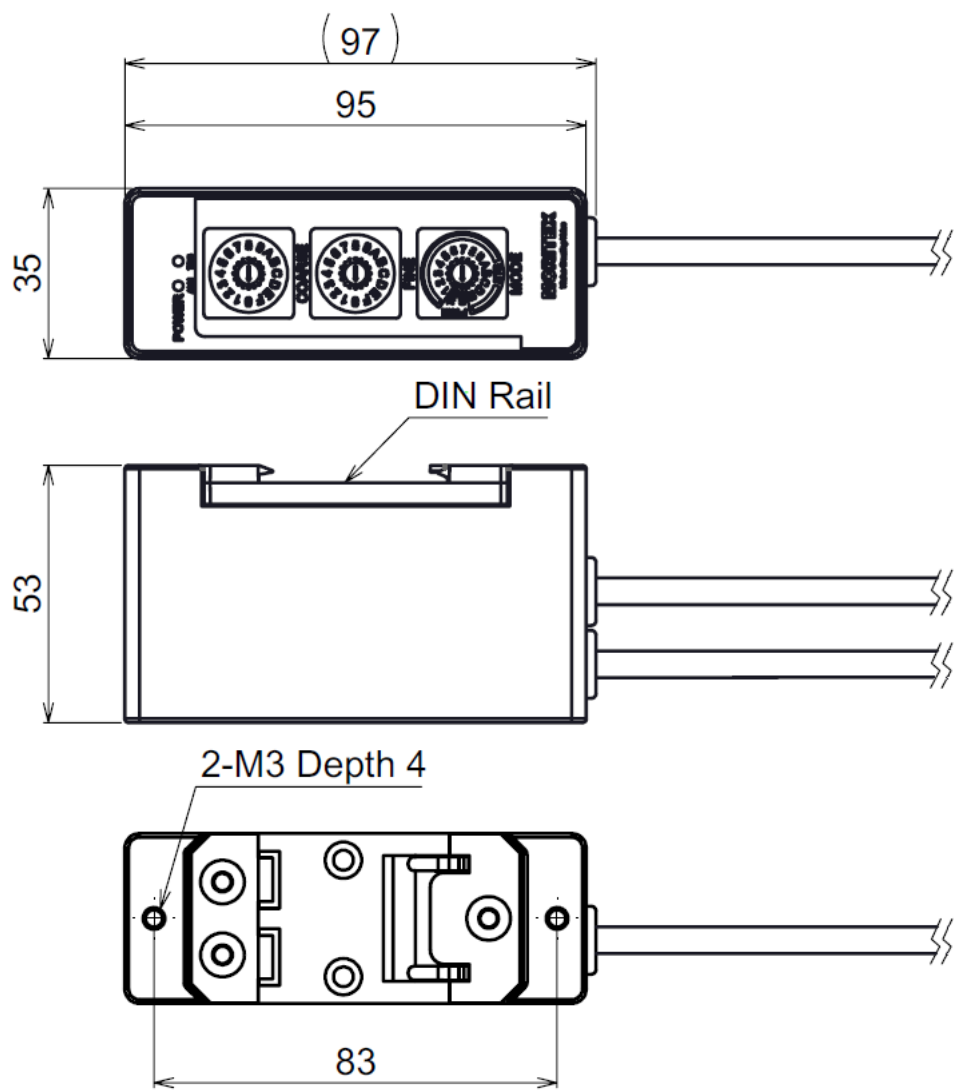

Pin Assignment

Input

Pin No.	Assignment
1	+24V
2	Trigger -
3	GND
4	Trigger +

Output

Pin No.	Assignment
1	+24V
2	NC
3	GND
4	NC

All specifications are subject to change without prior notice. This datasheet or any extracts thereof may only be used in other publications with express permission of MORITEX. © MORITEX North America, Inc.

