
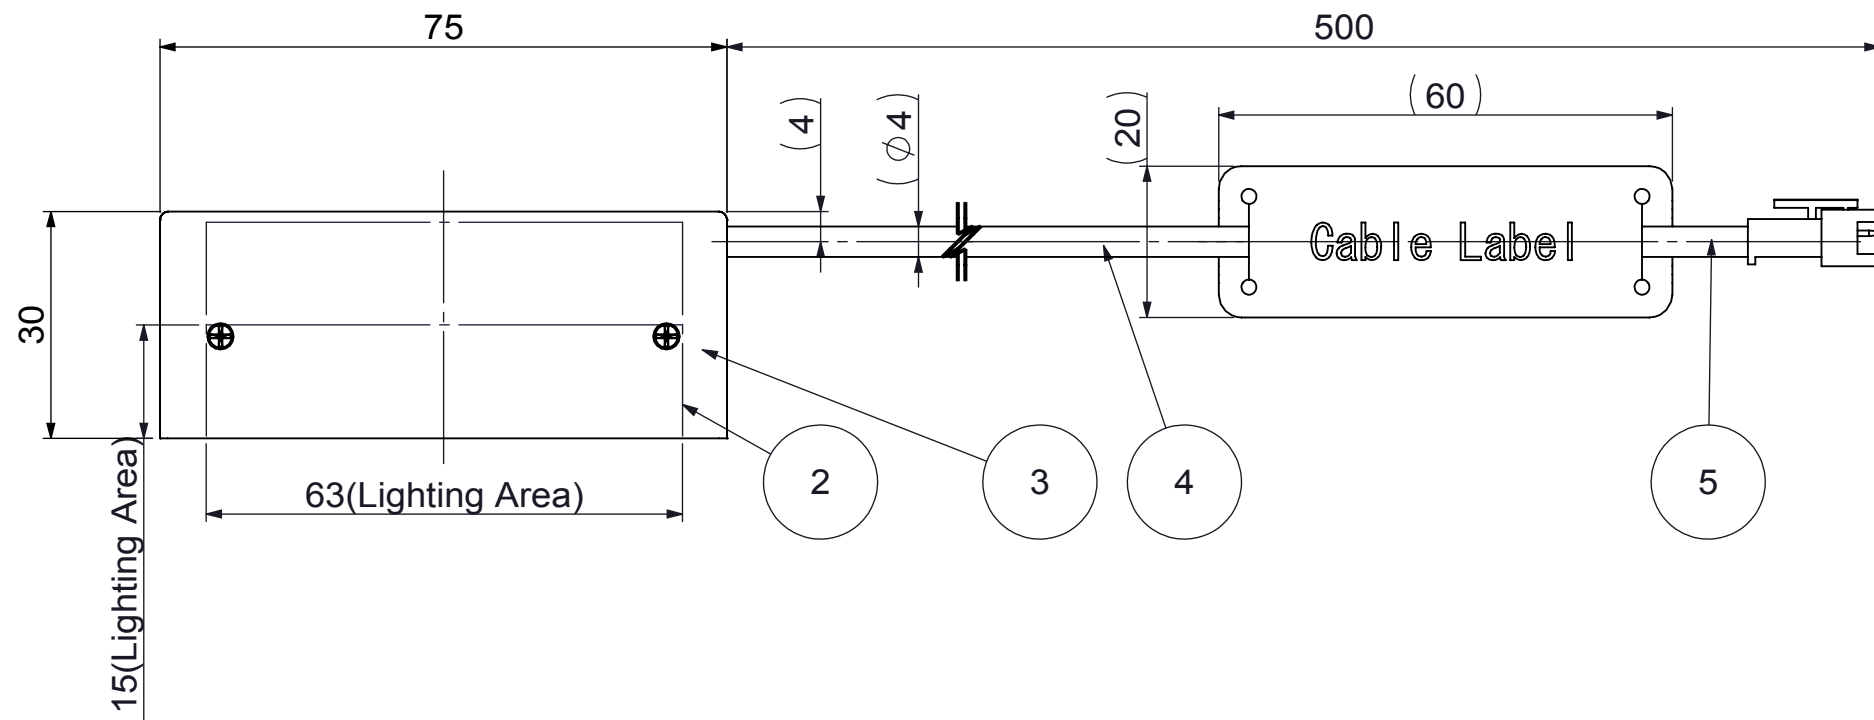


Absolute Max. Rating	24VDC
Power	3.0 W

JST SMR-03V-B CONNECTOR			
REF DRAWING	No	Assign	WIRE COLOR INSIDE
 	PIN 1	+V	RED/BROWN
	PIN 3	-V	BLACK/BLUE

RoHS Compliance

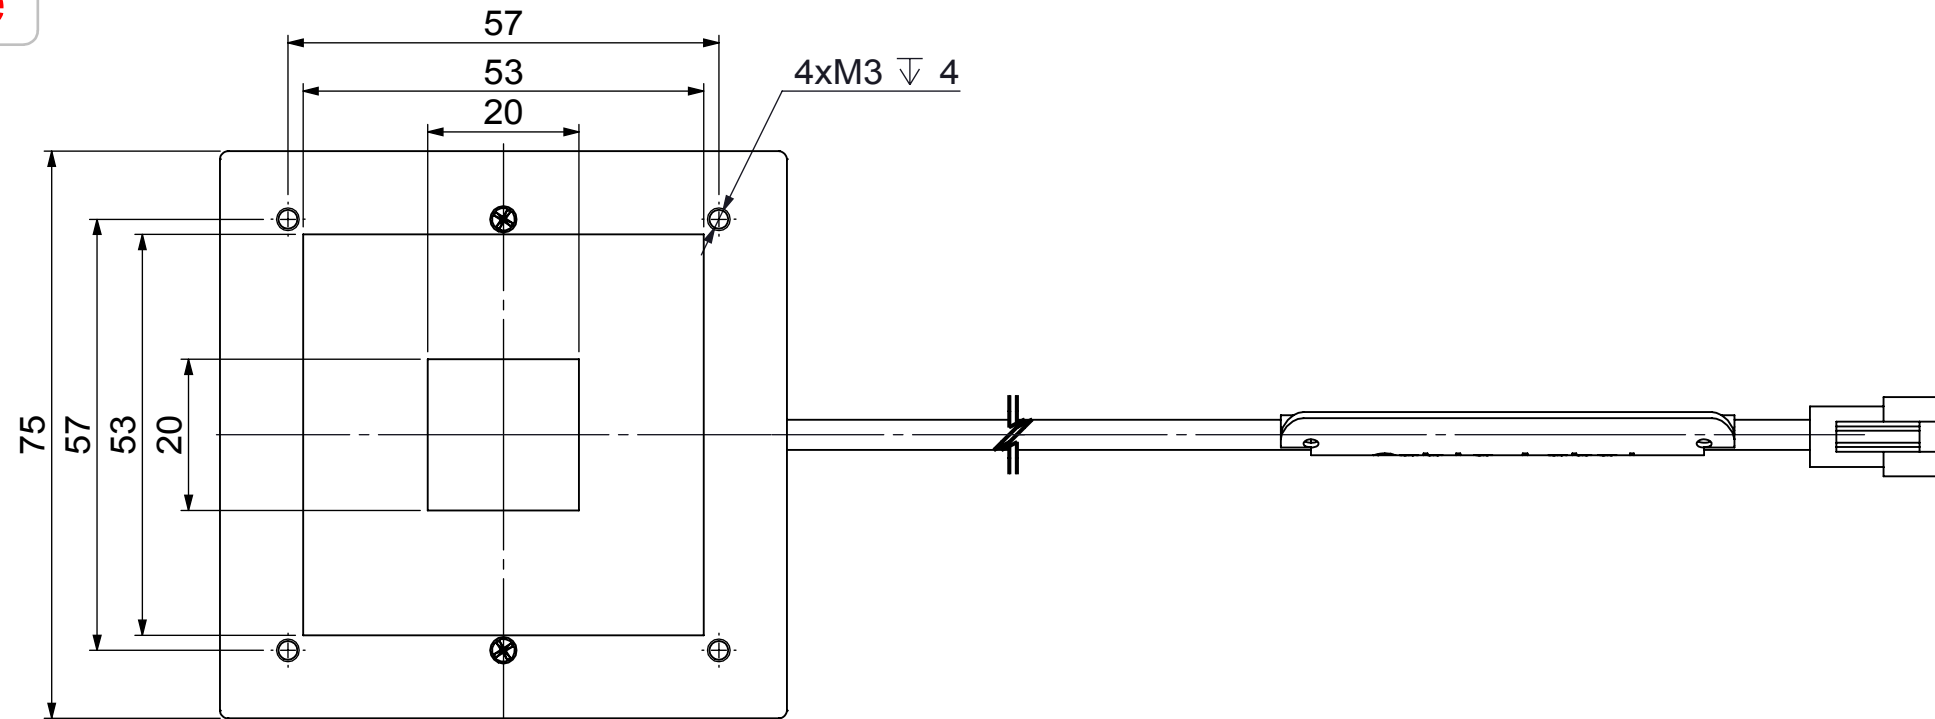

ANGLE TOL.	LENGTH OF SHORT ONE ON THE BANK			
	TOL. A	TOL. B	10' < L ≤ 50'	50' < L ≤ 120'
	±1°	±30'	±20'	±10'
				400' < L
				±5'

ORIGINAL SIZE: A-3

CHAMFER TO	CLASS OF MEASURE			6 < L
	L < 0.5	0.5 ≤ L ≤ 3	3 < L ≤ 6	
TOL A	IN DRW.	±0.2	±0.5	±1.0
TOL B				

[illegible]

CLASS OF MEASURE				
	$0.5 < L$ ≤ 6	$6 < L$ ≤ 30	$30 < L$ ≤ 120	$120 < L$ ≤ 400
				$400 < L$ ≤ 1000
TOL. A	± 0.05	± 0.1	± 0.15	± 0.2
TOL. B	± 0.1	± 0.2	± 0.3	± 0.5
TOL. C				± 0.8

5	JST(SMP-03V-BC)	-	1	-
4	Cable	-	1	-
3	Lighting Guide Plate	-	4	-
2	Housing	-	1	-
1	LED	-		-

						FINISH	UNIT : mm 					
						SURFACE ROUGHNESS	MODEL NAME					
						MATERIAL	CV-DSQ-75X75-15W					
	A00	20130911	NEW		JK		PART NAME					
MARK	REV	DATE	CHANGE		SIGNATURE	CHAMFER	OUTLINE DRAWING					
DESIGNED		DRAWN		CHECKED	APPROVED		DRAWING NO.		REV	SHT		
Jacky Wang		Jacky Wang		Yong Peng	Jonathan Li	TOLERANCE	1479937		A00	1/1		
						SCALE	1:1					