
STRAIGHTNESS & FLATNESS TOLERANCE	CLASS	NOMINAL LENGTH					
		L ≤ 10	10 < L ≤ 30	30 < L ≤ 100	100 < L ≤ 300	300 < L ≤ 1000	1000 < L ≤ 3000
	H	±0.02	±0.05	±0.1	±0.2	±0.3	±0.4
	K	±0.05	±0.1	±0.2	±0.4	±0.6	±0.8


PERPENDICULARITY TOLERANCE	CLASS	NOMINAL LENGTH ON SHORTER SIDE			
		L ≤ 100	100 < L ≤ 300	300 < L ≤ 1000	1000 < L ≤ 3000
	H	±0.2	±0.3	±0.4	±0.5
	K	±0.4	±0.6	±0.8	±1.0


RoHS

Absolute Max. Rating / 最大定格	24VDC
Total Power / 消費電力合計	19.5W

M12 Male Connector

Ref. Drawing	No	Assign	Wire Color
	1	+V	Red/Brown
	2	NC	
	3	-V	Black/Blue
	4	NC	

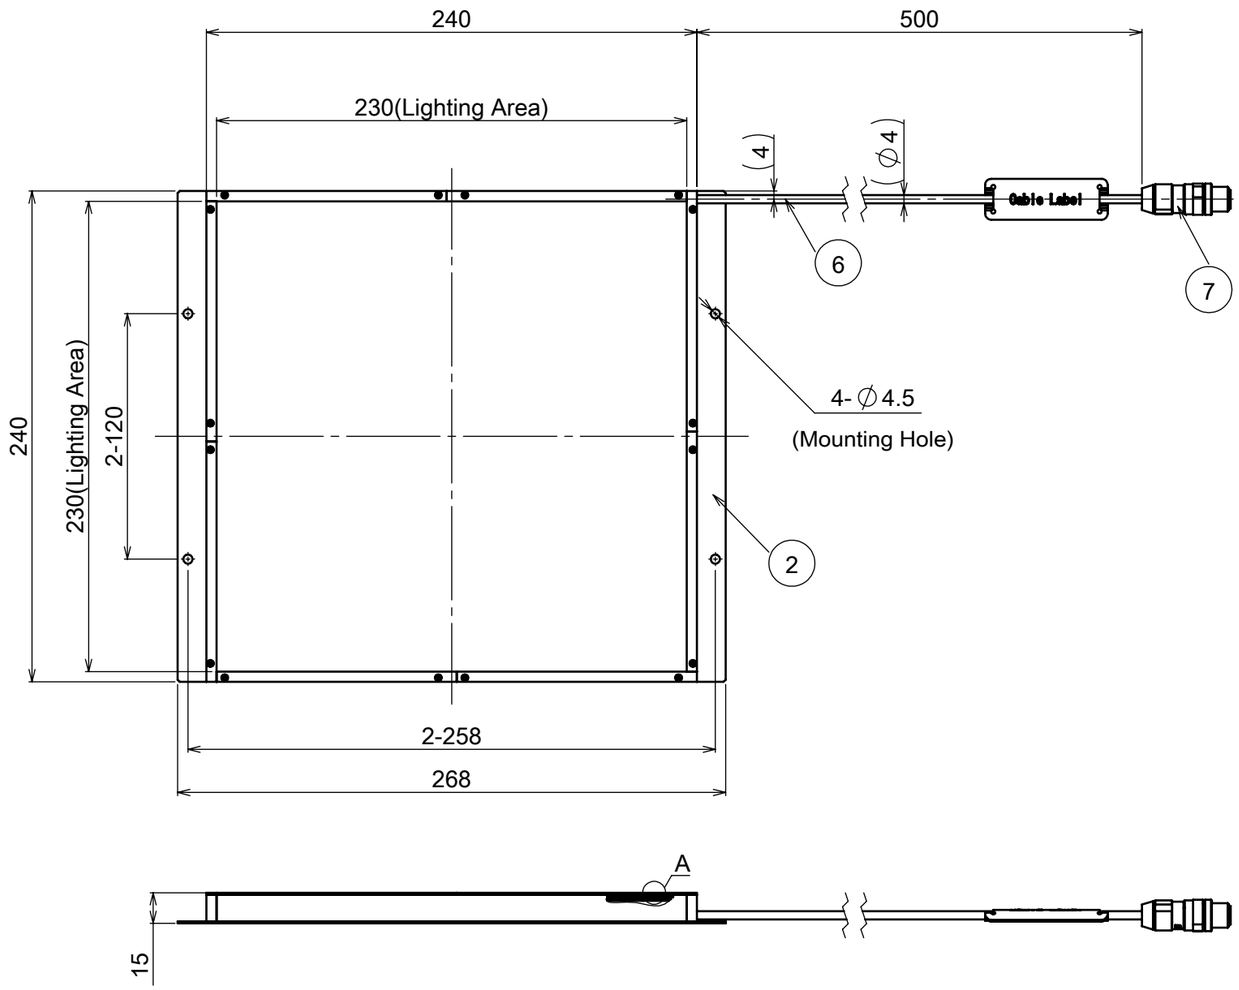

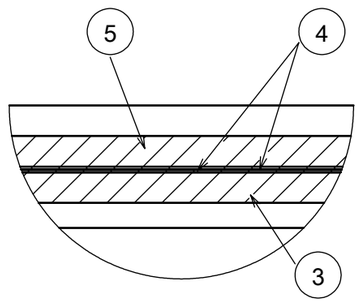

DETAIL A
(5:1)

NO.	PART DESCRIPTION	MODEL NUMBER	QU.	NOTE
7	CONNECTOR	M12 Male	1	
6	CABLE		1	
5	COVER PLATE		1	PMMA(Clear)
4	OPTICAL SHEET		2	
3	DIFFUSER PLATE		1	
2	HOUSING		1	Aluminium Alloy/Mat Black Anodizing
1	LED(Red)			

MARK	COM-REV	DATE(YMD)	CHANGE	SIGNATURE
x	A-001	2017.May.09	NEW	-

DESIGNED	DRAWN	CHECKED	APPROVED
Yang Ye	Yang Ye	Yong	

FINISH -
SURFACE -
MATERIAL -
CHAMFER -
TOLERANCE CLASS -
SCALE 1:3

UNIT:mm

MORITEX
Vision Creating Value

MODEL NAME: CV-NFL-230X230R-M12
PART NAME: OUTLINE DRAWING
DRAWING NO.: A22632A0100501A-001
SHEET: 1/1

ORIGINAL SHEET FORMAT SIZE : A3

OLD DRAWING NO.